

PT467E-M10 Pressure Sensors

*THE CLASSIC MELT PRESSURE TRANSDUCER
FOR SPACE RESTRICTED AREAS*



Description

Dynisco model PT467E-M10 Series of pressure transducers features a small, 6 mm sensing element ideal for general purpose polymer melt pressure measurements with space restriction issues or on small lab extruders and rheometers. The PT467E-M10 features a 0.06" diameter exposed capillary. This allows 1/16" radius bends. It also has a free-spinning jam nut that simplifies installation. Standard transducers are supplied with a DyMax® coated diaphragm for increased wear resistance and longevity. A 6-pin bendix-style connector is used for easy connect and disconnect. The PT467E is designed for the restricted locations is ideal for nozzle pressure measurements in Injection Molding, small lab extruders and rheometers.


Features

- 3.33 mV/V full scale output
- 6 mm sensing element
- Accuracy of better than $\pm 1\%$
- Pressure ranges from 0 - 5,000 psi to 0 - 10,000 psi
- Good stability and repeatability
- Fits in space limited areas
- Internal 80% shunt calibration

Performance Characteristics	
Ranges (psi):	0 - 5,000, 0 - 7,500, 0 - 10,000
Accuracy:	±1.0% FSO
Repeatability:	±0.2% FSO
Mounting Torque:	500 inch - lbs. maximum
Maximum Pressure:	2 x full range
Material in Contact with Pressure Media:	Inconel 718
Weight:	1.5 lbs.
Electrical Characteristics	
Configuration:	Four active arm bonded Wheatstone bridge strain gage
Bridge Resistance:	Input: 345 Ohms minimum; Output: 350 Ohms ±10%
Full Scale Output:	3.33 mV/V ±2.0%
Zero Balance:	±10% full scale
Excitation:	10 Vdc recommended, 12 Vdc maximum
Internal Shunt Calibration (R-Cal):	80% FSO ±1.0%
Insulation Resistance:	1,000 megohms at 50 Vdc


Temperature Characteristics	
Transducer Diaphragm:	
Maximum Diaphragm Temperature:	750°F (400°C)
Zero Shift due to Temperature Change:	20 psi/100°F maximum (37 psi/100°C)
Electronics Housing:	
Maximum Temperature:	250°F (121°C)
Zero Shift due to Temperature Change:	0.05% full scale/°F maximum (0.10% full scale/°C)
Sensitivity Shift due to Temperature Change:	0.02% full scale/°F maximum (0.04% full scale/°C)

Ordering Guide for PT467E-M10

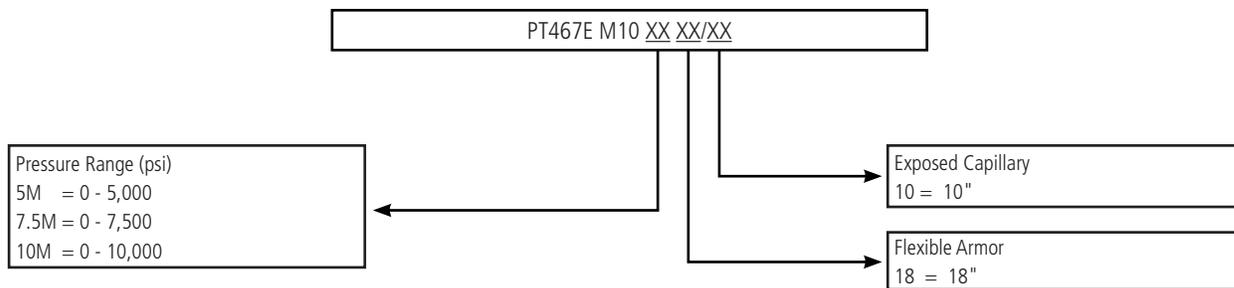

Standard mating connector Dynisco P/N 711600 or 6-pin mating connector cable assembly sold separately.

Dimensions

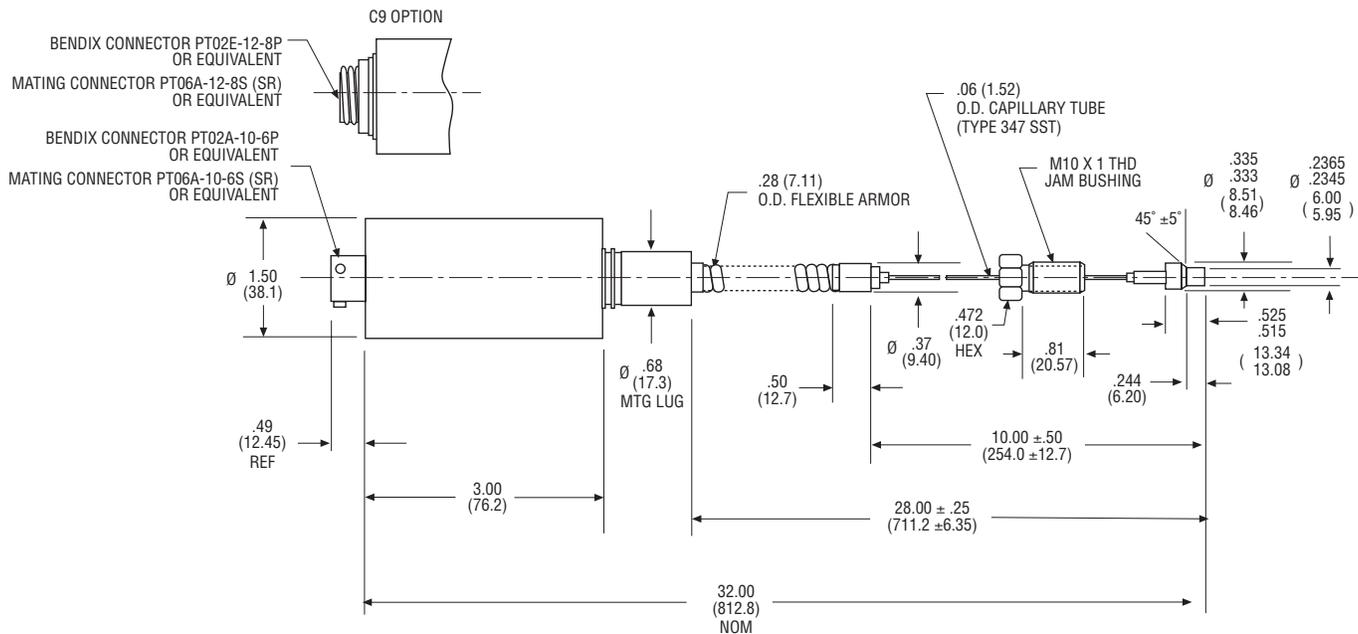

All dimensions are in inches (millimeters) unless otherwise specified



All dimensions are inches (mm) unless otherwise specified.
©2016. Dynisco reserves the right to make changes without notice.
Refer to www.dynisco.com for access to Operator Manual and other support documentation.
DSPT467EM10
Rev: 0117



www.dynisco.com

Dynisco
38 Forge Parkway
Franklin, MA 02038
USA

Hotline 1-800-Dynisco
www.dynisco.com
Phone +1 508 541 9400
Fax +1 508 541 6206
Email infoinst@dynisco.com

Dynisco Europe, GmbH

Pfaffemstr. 21 Phone +49 7131 297 0
74078 Hellbronn Fax +49 7131 297 166
Germany Email dyniscoeurope@dynisco.com

Dynisco Shanghai

Building 7A, No. 568 Phone +86 21 34074072-819
Longpan Rd Malu Toll Free +86 400 728 9117
Jiading, 201801 China Fax +86 21 34074025