

# MDT4X2F Series Pressure Sensors With SIL2

*SIL2 AND PL'C' RATING WITH LOCAL AND  
REMOTE REZEROING CAPABILITY*



## Description

The MDT4X2F Pressure Sensor Series provides special features for critical field applications in high noise surroundings. The utilization of unshielded cables is possible for long distance transmission free of noise interference for the converted process pressure signal 4-20 mA. The MDT4X2F comes equipped with adjustable zero and span side-mounted potentiometers. MDT4X2F Series mA sensors can be rezeroed in two ways: locally via the zero potentiometer, or remotely via shorting two pins together (contact closure). Optional thermocouple or RTD configurations are available to provide melt temperature.


## Features

- Simple unshielded two-wire cable connection in high noise ambients
- Efficient rezero adjustments can be made locally or remotely to the sensor
- 4-20 mA two-wire signal output
- Installation for media temperatures up to 400°C
- Adjustable zero and span, via side-mounted pots
- Flexible capillary connection between stem with diaphragm and housing
- 3rd-party agency analysis (exida™) and self-certified based on FMEDA analysis and internal audit
- Meets Performance Level 'c' as defined by the Machinery Directive (Category 1)
- Meets the following compliance directives, when properly installed and used:
  - – SIL2
  - – Machinery Directive EN ISO 13849-1

Performance Characteristics	
<b>Pressure Range:</b>	0-17 bar to 0-2000 bar
<b>Accuracy:</b>	MDT42XF ±.25% FSO, BFSL > 50 bar MDT43XF ±.5% FSO, BFSL ≤ 50 bar
	MDT46XF ±.5% FSO, BFSL > 50 bar ±1% FSO, BFSL ≤ 50 bar
<b>Repeatability:</b>	MDT422F ±0.1% FSO (up to 50 bar ±0.2% FSO); MDT462F ±0.2% FSO
<b>Resolution:</b>	Infinite
<b>Maximum Overload (without influencing operating data):</b>	2x pressure range for range 1000 and 1400
<b>Burst Pressure:</b>	6x pressure range max. 3000 bar
<b>Material in Contact with Media:</b>	15-5 PH SST (Mat. No. 1.4545) DyMax® coated
Electrical Characteristics	
<b>Configuration:</b>	4-arm Wheatstone bridge strain gage
<b>Internal Shunt Calibration:</b>	80% of full scale ±1%
<b>Output Signal:</b>	2-wire 4-20 mA
<b>Supply Voltage:</b>	12-36 Vdc
<b>Zero Balance:</b>	±1%
<b>Rezero Initiation:</b>	Locally via zero potentiometer, or remotely via short circuit between pins "D" and "F"
<b>Range Calibration 80% FSO:</b>	"Short circuit" between connections pins "E" and "F" at the sensor or externally from the control room
<b>Load Resistance:</b>	Maximum 1200* at 36 Vdc Maximum 500* at 24 Vdc
<b>Isolation Resistance:</b>	1000M* at 50 Vdc

Temperature Influence	
<b>Diaphragm:</b>	
<b>Max. Temperature:</b>	400°C
<b>Zero Shift (due to temperature change):</b>	MDT422F X < 0.2 bar/10°C MDT462F X < 0.4 bar/10°C
<b>Housing:</b>	
<b>Max. Temperature:</b>	85°C
<b>Zero Shift (due to temperature change):</b>	±0.2% FSO/10°C
<b>Sensitivity Shift (due to temperature change):</b>	MDT422 X ±0.1% f.s.v./10°C up to 50 bar ±0.2% f.s.v./10°C MDT462 X ±0.4% f.s.v./10°C
Approvals & Self Certifications	
<b>CE:</b>	Directive 2004/108/EC
<b>ISO:</b>	ISO 9001:2008 production environment
<b>PL'c':</b>	EN ISO 13849-1 meeting the performance requirements of a safety-related part of a control system for Performance Level 'c' (PL'c') safety system when installed per Category 1
<b>SIL2:</b>	Safety Integrity Level 2

# Ordering Guide

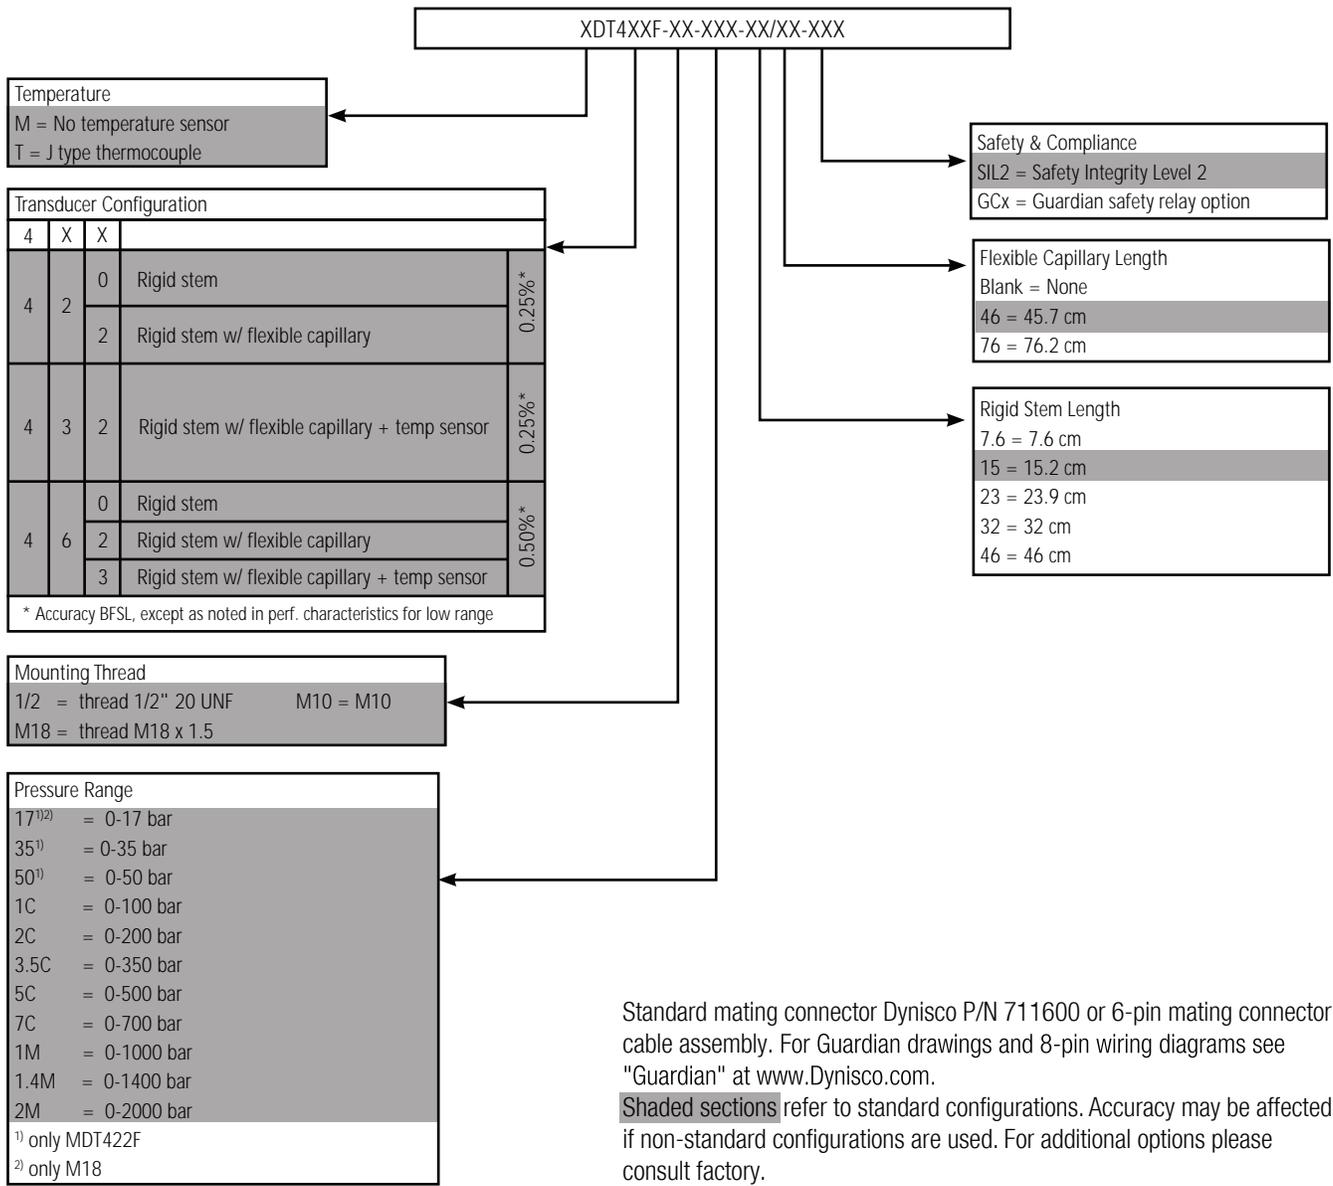


Standard mating connector Dynisco P/N 711600 or 6-pin mating connector cable assembly. For Guardian drawings and 8-pin wiring diagrams see "Guardian" at [www.Dynisco.com](http://www.Dynisco.com).  
**Shaded sections** refer to standard configurations. Accuracy may be affected if non-standard configurations are used. For additional options please consult factory.

## ACCESSORIES

Cleaning Tool Kit, Machining Tool Kit, Guardian (Machinery Directive) Safety Relay—see Guardian Data Sheet for details; NaK Fill; UPR Process Indicator, ATC Process Controller. For additional options please contact the factory.

## Dimensions

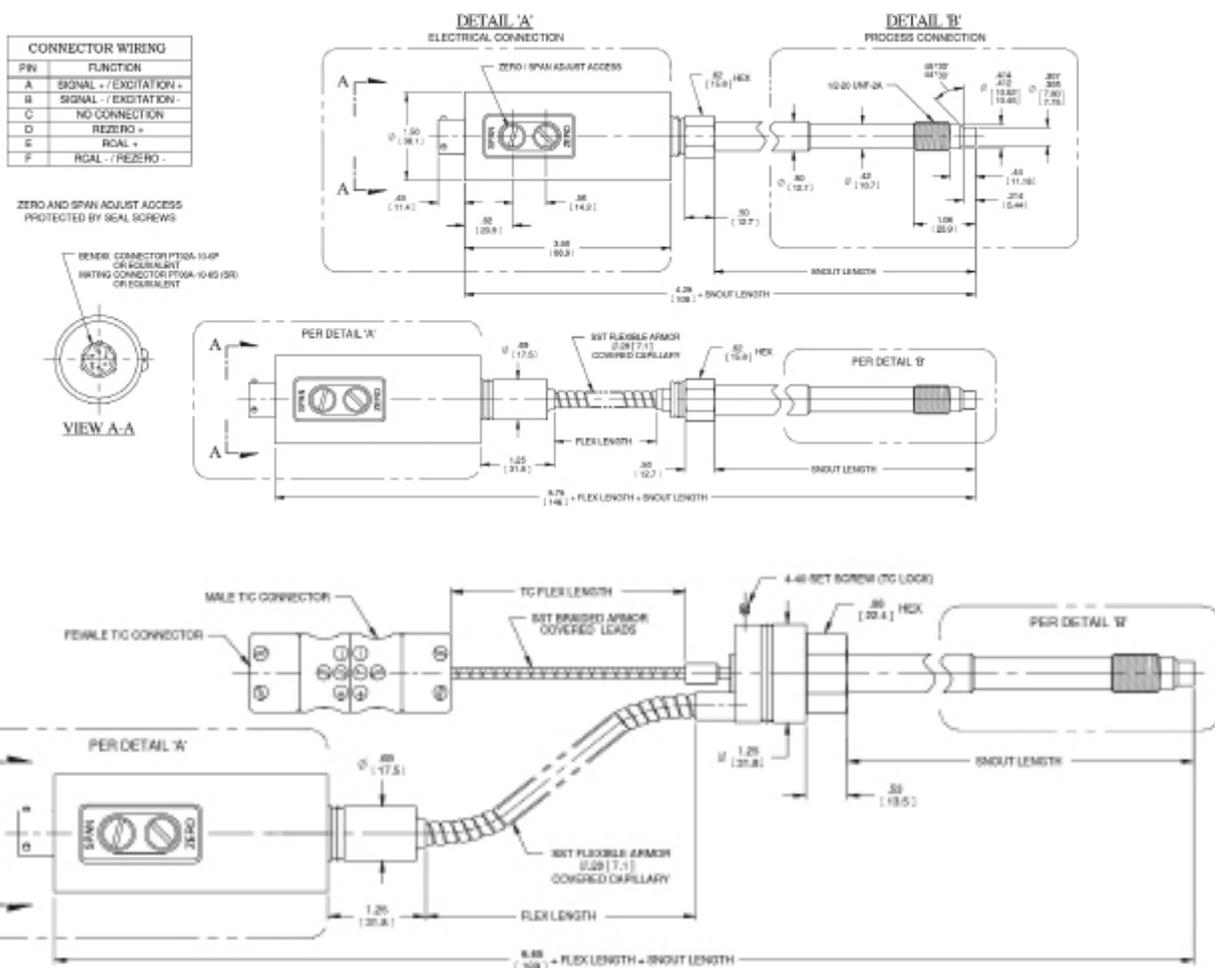

**NOTES:**

1. DIMENSIONS ARE IN INCHES ( MILLIMETERS ).
2. DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
3. NOT ALL CONFIGURATIONS & OPTIONS ARE SHOWN. CONSULT FACTORY.

All dimensions are inches (mm) unless otherwise specified.



[www.dynisco.com](http://www.dynisco.com)

All dimensions are inches (mm) unless otherwise specified.  
©2016. Dynisco reserves the right to make changes without notice.  
Refer to [www.dynisco.com](http://www.dynisco.com) for access to Operator Manual and other support documentation.  
ECO: 53513  
Rev: 010623

**Dynisco**  
38 Forge Parkway  
Franklin, MA 02038  
USA  
Hotline 1-800-Dynisco  
[www.dynisco.com](http://www.dynisco.com)  
Phone +1 508 541 9400  
Fax +1 508 541 6206  
Email [infoinst@dynisco.com](mailto:infoinst@dynisco.com)

**Dynisco Europe, GmbH**  
Pfaffenstr. 21  
74078 Hellbronn  
Germany  
Phone +49 7131 297 0  
Fax +49 7131 297 166  
Email [dyniscoeurope@dynisco.com](mailto:dyniscoeurope@dynisco.com)

**Dynisco Shanghai**  
Building 7A, No. 568  
Longpan Rd Malu  
Jiading, 201801 China  
Phone +86 21 34074072-819  
Toll Free +86 400 728 9117  
Fax +86 21 34074025