

DYNISCO MODEL IPX185

Smart Pressure Transmitter for Button-Seal Mounting

Description

Dynisco's IPX185 is a smart pressure transmitter with ambient and process temperature compensation, featuring a thin film sensor and proprietary fabrication techniques. Featuring the familiar "button - seal" mounting of Dynisco's PT290 Series, the IPX185 is ideal for applications requiring the highest accuracy. Remote HART® digital communication simplifies operator access for configuration of transmitter parameters such as tag I.D. and span.

Features

- Accuracy of better than $\pm 0.15\%$ of range independent of process temperature
- 4 to 20 mA, 2 - wire output
- HART digital communication
- 5 : 1 span turn - down capability
- Ambient and process temperature compensation
- Optional 100 Ohm platinum RTD output

Benefits

- Improves process optimization and removes temperature effects
- Industry standard
- Process industry standard
- Allows use in multiple ranges
- Improved accuracy
- Process temperature measurement without a second intrusion into the process



Specifications



Performance Characteristics

Ranges:

psi: 0 - 750, 0 - 1,500, 0 - 3,000, 0 - 5,000, 0 - 7,500

bar: 0 - 50, 0 - 100, 0 - 200, 0 - 350, 0 - 500

Accuracy:

$\pm 0.15\%$ of range: Within pressures of 20% to 100% of range and process temperatures of 77°F to 575°F (25°C to 300°C) ($\pm 0.25\%$ for 750 psi range)

$\pm 0.25\%$ of range: Within pressures of 0 psig to 20% of range and above process temperatures ($\pm 0.50\%$ for 750 psi range)

Hastelloy:

$\pm 0.30\%$ of range: Within pressures of 20% to 80% of range and process temperatures of 77°F to 575°F (25°C to 300°C) ($\pm 0.60\%$ for 750 psi range)

$\pm 0.50\%$ of range: Within pressures of 0 psig to 20% of range ($\pm 1.00\%$ for 750 psi range)

Temperature Characteristics

Operating temperature ranges (compensated):

Process: 77°F to 575°F (25°C to 300°C) option to 660°F (350°C)

Electronics: 77°F to 140°F (25°C to 60°C)

Resolution: 0.035% or better

Zero span and adjustment:

Zero: +80% of range

Span: 20% to 100% of range

Turn-down: 5 : 1 maximum

Overpressure limit: 1.5 x range

Sample rate: ≤ 50 msec

Long term stability: $< 0.09\%$ of span per year

Temperature effects:

Electronics: $\pm 0.15\%$ of range/100°F ($\pm 0.027\%$ of range/10°C)

Humidity limits: 0% to 90% relative humidity, non - condensing

Electrical Characteristics


Output: 2 - wire, 4 to 20 mA. Hart digital communication superimposed on the 4 to 20 mA signal is available for remote configurations

Damping: Adjustable through HART communicator

Power supply: 12 to 36 Vdc

Electronics housing: IP 55, NEMA 3

Load limitation: Maximum loop resistance is determined by the voltage of the external power supply. Digital communication requires a minimum loop resistance of 250 Ohms. (See below)




Approvals (optional)

FM approved, Class I, Division II, Groups A, B, C and D

DYNISCO MODEL IPX185

Smart Pressure Transmitter for Button-Seal Mounting

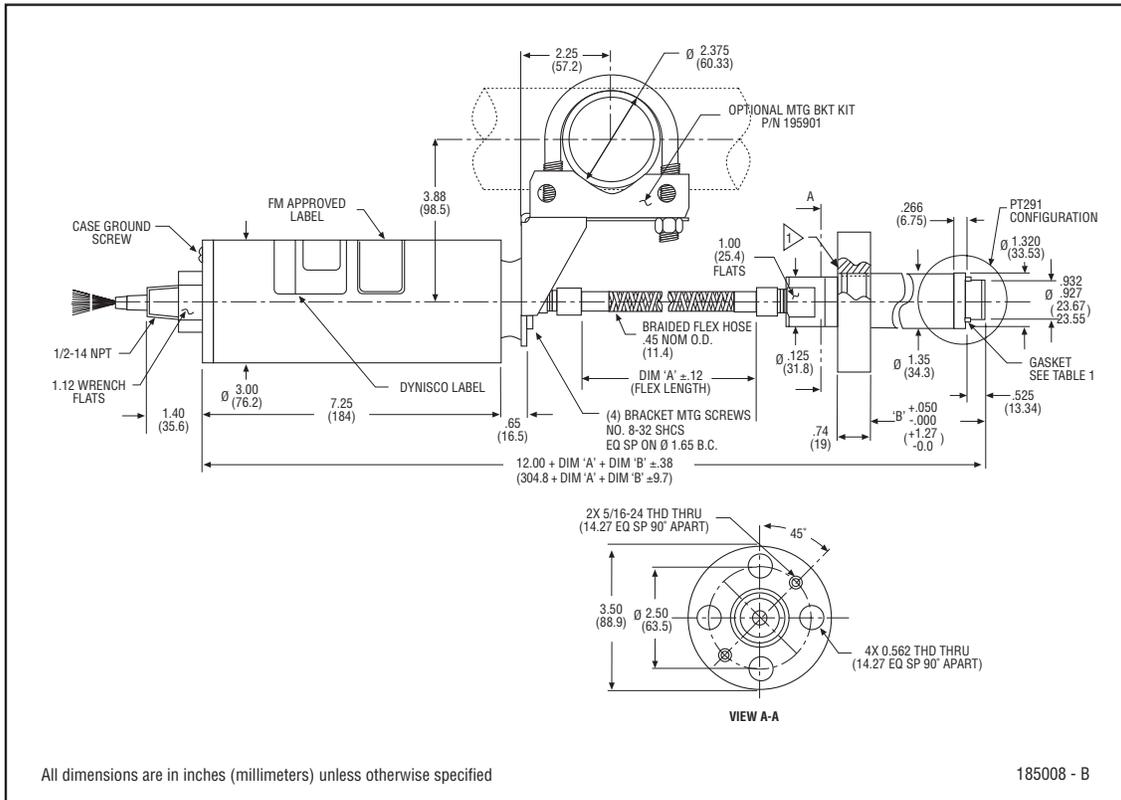

Ordering Guide

Model	Approvals		Diaphragm Material/Coating		Pressure Range			Rigid Stem		Flexible Stem		Options			
	Code	Description	Code	Material/Coating	Code	psi	Code	bar	Code	Length	Code	Length	Code	Description	
IPX185	(Blank)	Standard	(Blank)	15 - 5 PH SST with DyMax™	1.5M	0 - 1,500	1CB	(0 - 100)	4.77	4.77 (121)	30	30 (762)	M315	3 - wire w/ RTD output (snout temp.)	
	FM	Factory Mutual Approved Class I, Division II, Groups A, B, C & D	H	Hastelloy	3M	0 - 3,000	2CB	(0 - 200)	5.00	5.00 (127)			M625	Temperature compensated to 350°C	
					5M	0 - 5,000	3.5CB	(0 - 350)							
					7.5M	0 - 7,500	5CB	(0 - 500)							

Ordering Example: IPX185 - 1.5M - 4.77/30 - M625

Accuracy is based upon a maximum total length of process connection and flexible capillary of 36" (914). For each 6" (152) of length added accuracy is reduced by 0.10% to maximum length of 48" (1219) total. For total unit lengths over 48" (1219), the error correction software performance is reduced. Consult factory for specific requirements.

- Notes:**
- FM approved units include end cap with conductor connector and 20 ft. (6 meter) leads.
 - Standard unit includes a 6 pin Bendix connector and requires optional cable 929008 - 10 ft. (3 meter).
 - Standard unit with M315 option includes an 8 pin Bendix connector and requires optional cable 801726.
 - Mounting bracket P/N195901 recommended.

