




The Best Way To Automate Your Process

Limit Switches for Ordinary & Hazardous Locations

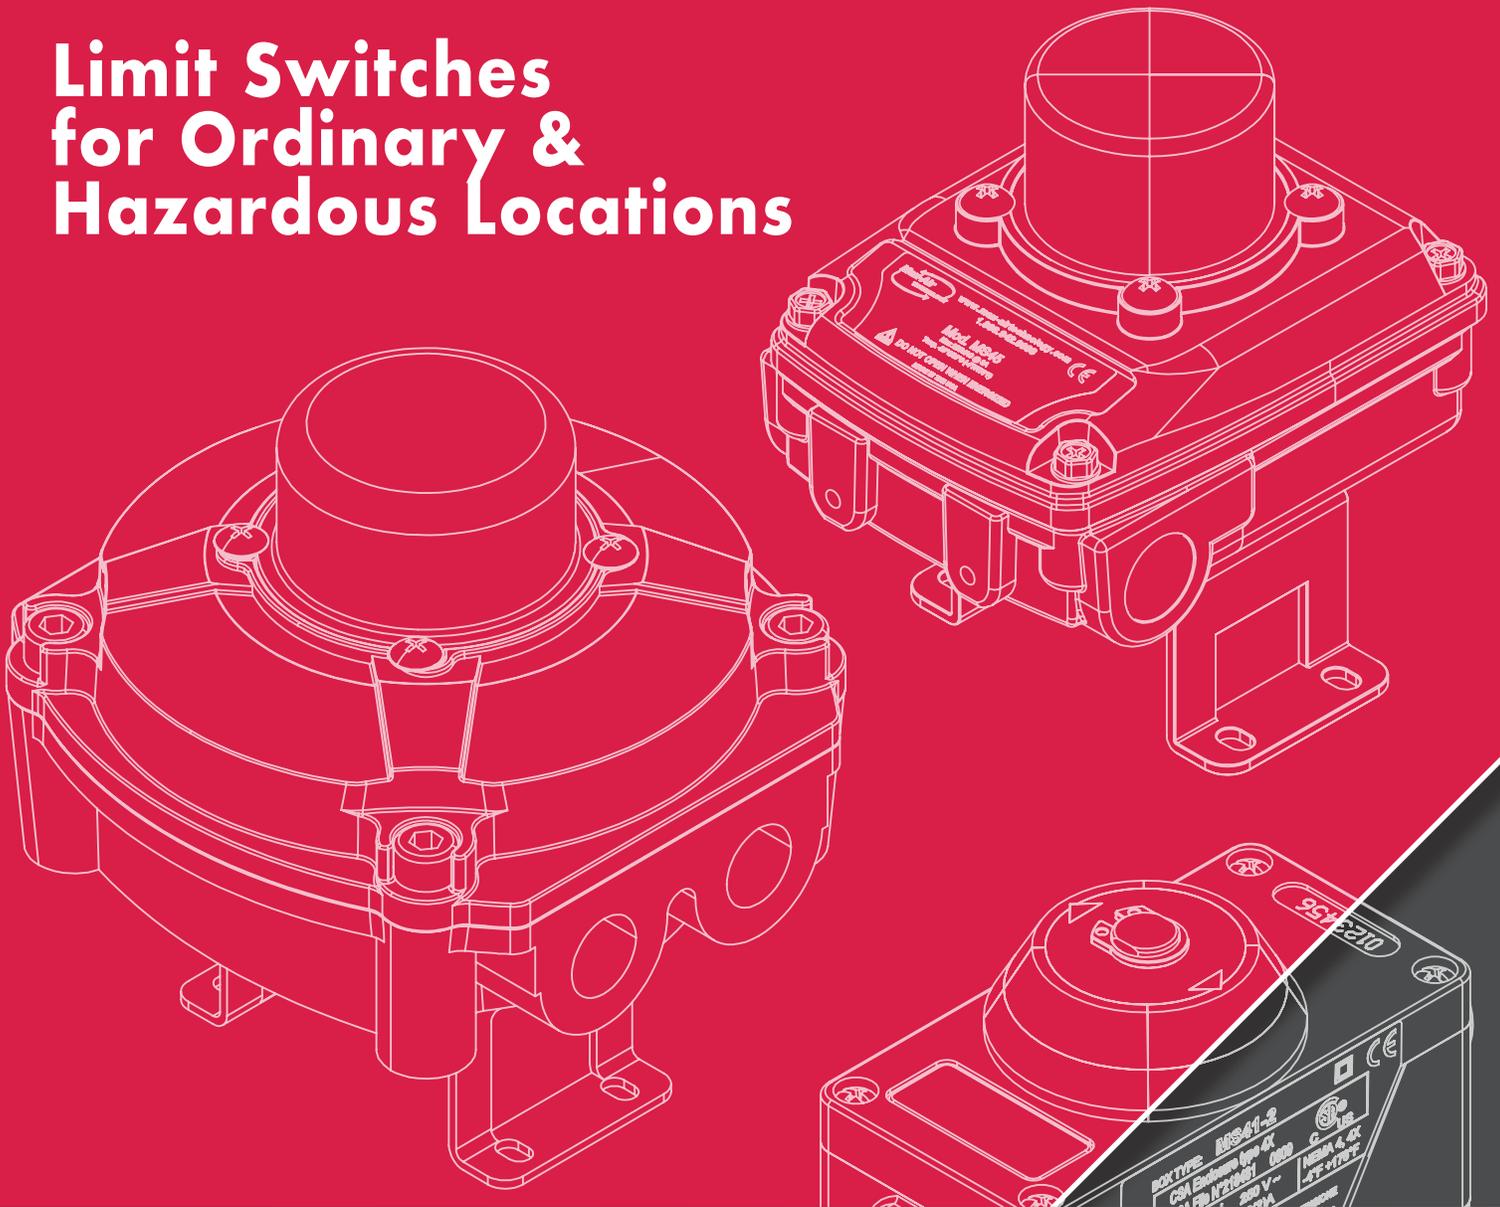


Limit Switches Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions


Limit Switches

Standard & hazardous duty limit switch boxes available with mechanical, proximity, or inductive switches.

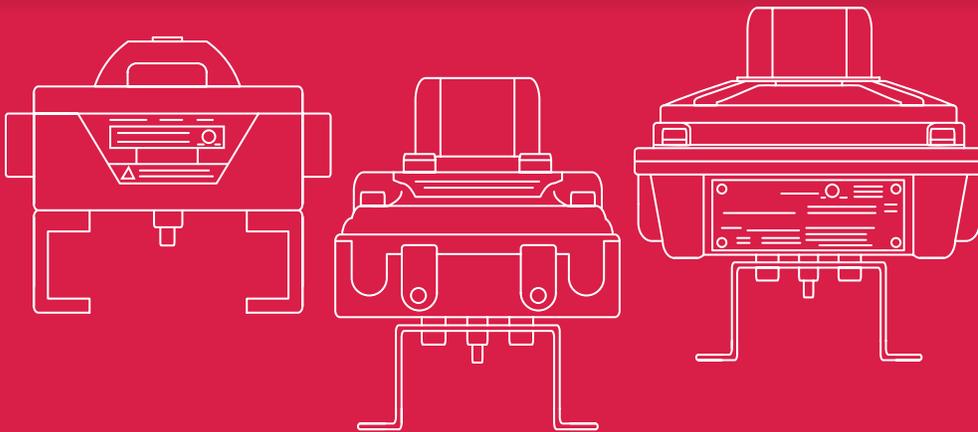

Max-Air limit switch boxes offer convenient and reliable switch feedback for actuated assemblies, for standard or hazardous duty environments. The NAMUR standard mounting design is compatible with all Max-Air pneumatic actuators.

48 Series Part Number Builder

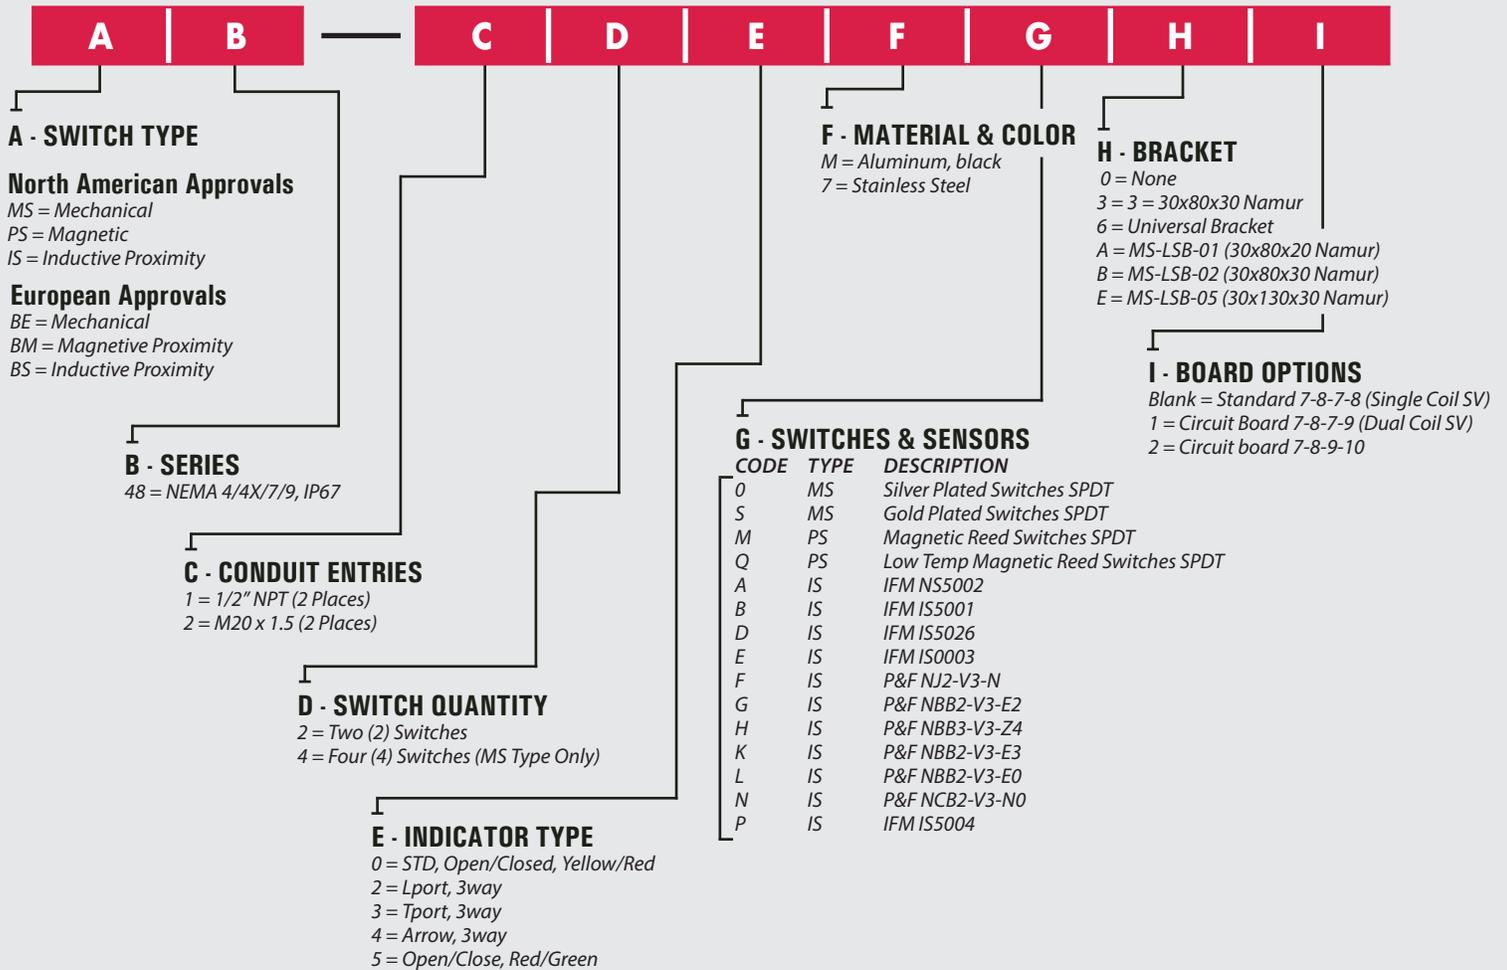


Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions




maxairtech.com

45 Series Part Number Builder


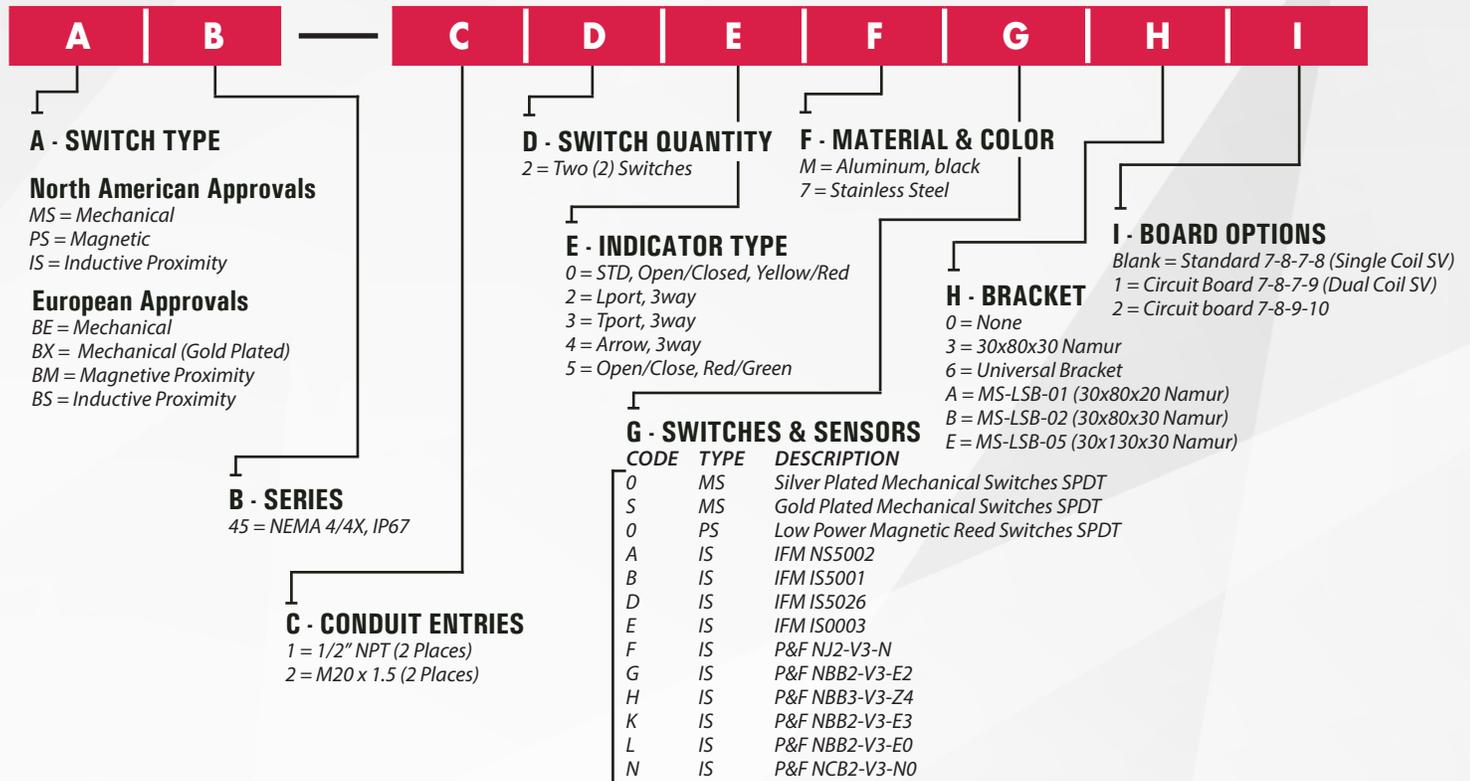


41 Series Part Number Builder

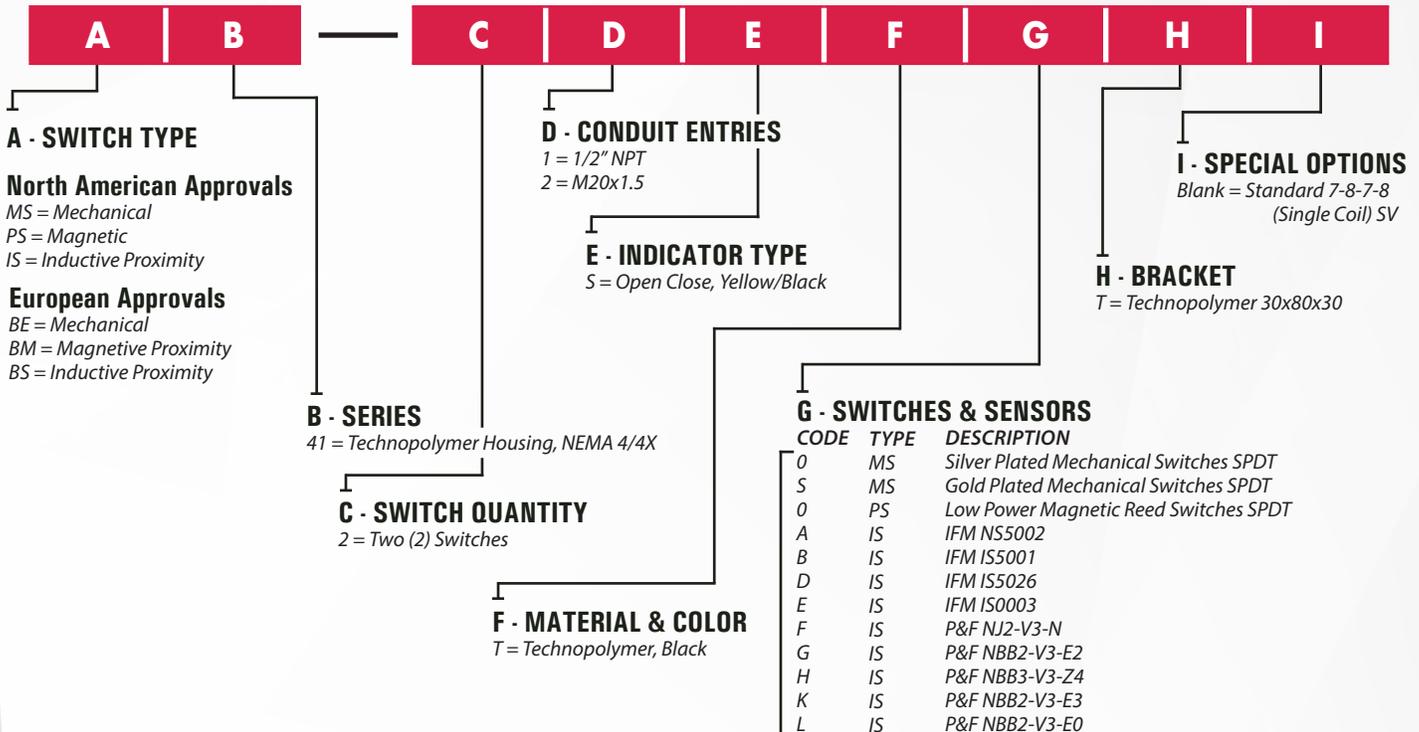

Limit Switches

Standard & hazardous duty limit switch boxes available with mechanical, proximity, or inductive switches.

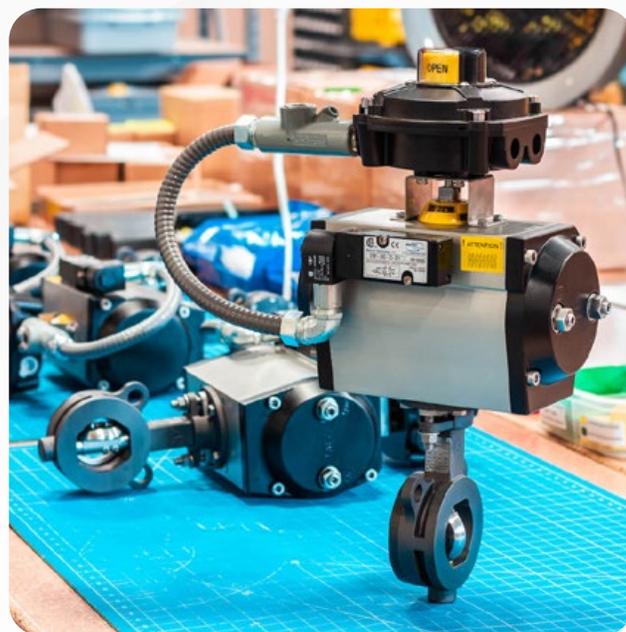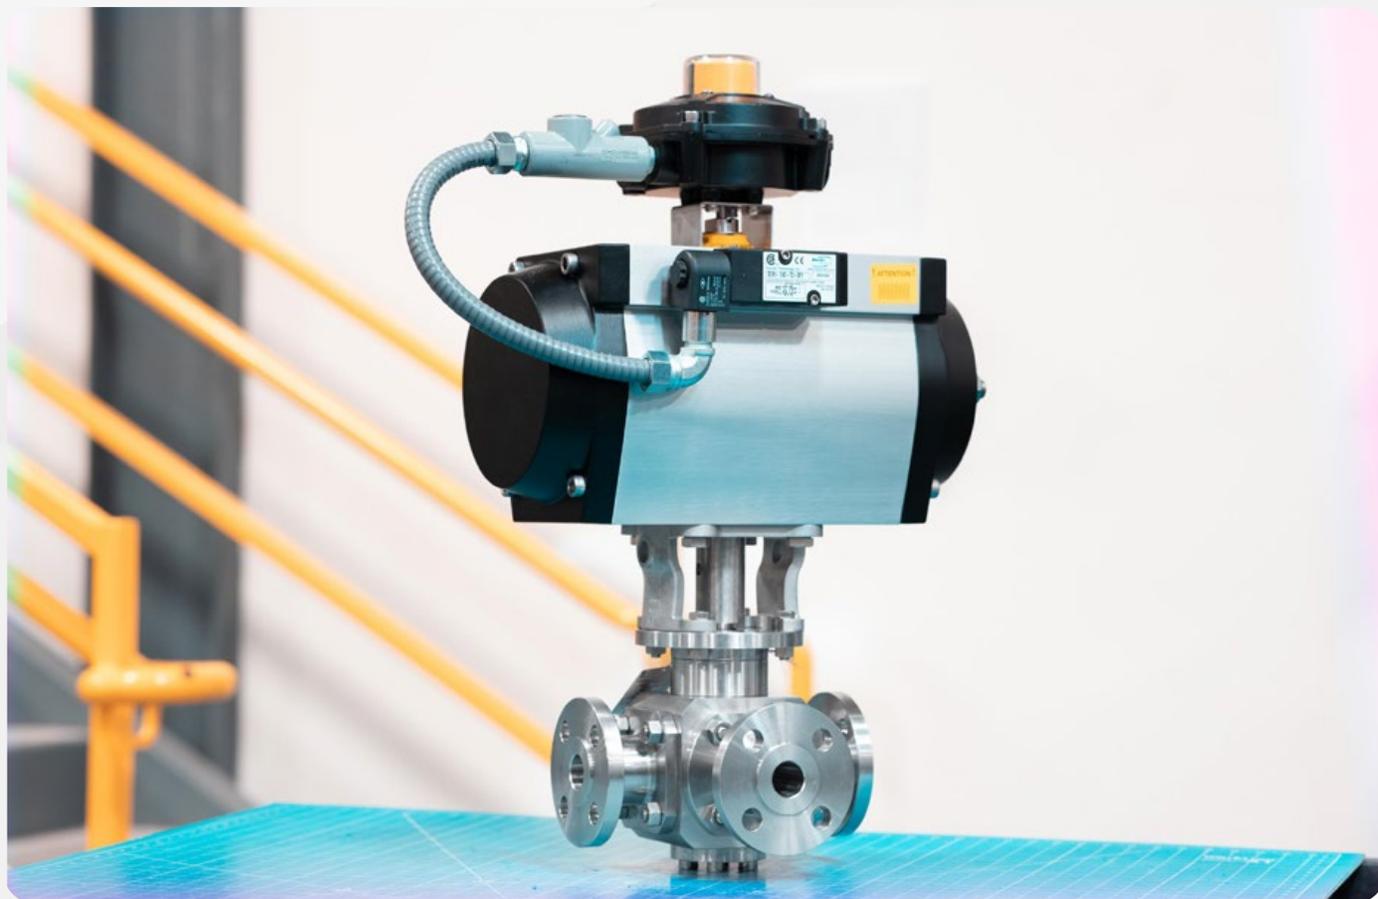

Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

Table of Contents

Pg - Description

[02 - Part Number Builder](#)

[05 - Table of Contents](#)

[06 - Features & Benefits](#)

[08 - Switch Types](#)

[10 - 48 Series Exploded Views, Materials, & Dimensions](#)

[12 - 45 Series Exploded Views, Materials, & Dimensions](#)

[14 - 41 Series Exploded Views, Materials, & Dimensions](#)

[16 - Wiring Diagrams](#)



STANDARD WARRANTY

Max-Air Technology Inc. | The Best Way to Automate Your Process

Max-Air Technology provides the following warranty regarding products manufactured by it. **THE WARRANTY STATED HEREIN IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES AND REPRESENTATIONS, EXPRESSED OR IMPLIED, OR STATUTORY, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.** Max-Air Technology warrants its products to be free from defects in materials and workmanship when these products are used for the purpose for which they were designed and manufactured. Max-Air Technology does not warrant its products against chemical or stress corrosion or against any other failure other than from defects in materials or workmanship. The warranty period is for twelve (12) months from installation date or eighteen (18) months from shipment date, whichever date comes first. Any claims regarding this warranty must be in writing and received by Max-Air Technology before the last effective date of the warranty period. Upon Max-Air Technology's receipt of a warranty claim, Max-Air Technology reserves the right to inspect the product(s) in question at either the field location or at the Max-Air Technology Manufacturing plant. If, after inspection of the product(s) in question, Max-Air Technology determines that the purchaser's claim is covered by this warranty, Max-Air Technology's sole liability and the purchaser's sole remedy under this warranty is limited to the refunding of the purchase price or repair or replacement thereof at Max-Air Technology option. Max-Air Technology will not be liable for any repairs, labor, material or other expenses that are not specifically authorized in writing by Max-Air Technology, and in no event shall Max-Air Technology be liable for any direct or consequential damages arising out of any defect from any cause whatsoever. If any Max-Air Technology product is modified or altered at any location other than Max-Air Technology – St. Louis (Missouri) UNITED STATES or Max-Air Technology – Agrate Brianza (MB) ITALY without the express written authorization of Max-Air Technology, said product is not covered by this warranty. The warranty for such products shall be subject only to the warranty relief, if any, provided by the suppliers and/or manufacturers of such products.

Features & Benefits

Standard & hazardous duty limit switch boxes available with mechanical, proximity, or inductive switches.

Standard/Hazardous Switch Feedback

Max-Air limit switch boxes offer convenient and reliable switch feedback for actuated assemblies, for standard or hazardous duty environments. The NAMUR standard mounting design is compatible with all Max-Air pneumatic actuators.

Standard Features:

- Compact Design & Quick Set Cams
- 3D Models Available for All Designs and Sizes
- Easy Wiring Through PCB Terminal, 10pt.
- Single and Dual-Coil Solenoid Valve Options
- High Visibility Open/Close Beacon
- 3-Way T-Port & L-Port Beacon Options
- Inclusive 30x80x30 NAMUR Mounting Bracket
- Other Mounting Brackets Available



41 Series Technopolymer

Cost effective mechanical or non-contact switches with epoxy resin enclosure for ordinary locations.



45 Series Aluminum & Stainless

Mechanical or non-contact switch options for ordinary locations.

48 Series Aluminum & Stainless

Mechanical or non-contact switch options with heavy duty enclosure for hazardous locations.

Locations	Ordinary, Hazardous, NEMA 4/4x
Materials	Aluminum, Stainless Steel
Ambient Temp. Range	-4°F to 140°F Standard (-40°F Low, 176°F High)
Switch Type	Mechanical, Inductive, & Magnetic

Voltages	AC/DC, Ordinary & Hazardous Locations
Mounting	NAMUR VDI/VDI 3845
Available Options	T-Port, L-Port, Special Beacons, Low Temp Option

Limit Switch Box Selection

Start from the top of the chart and work down to select the correct Limit Switch Box.


Environment	Standard			Corrosive		
	Ordinary	Hazardous		Ordinary	Hazardous	
Electrical Classification						
Temperature	Standard	Standard	Extreme (Low)	Standard	Standard	Extreme (Low)
Recommended Series/Options	41 Series 45 Series (Aluminum)	45 Series (BX) w/ Intrinsically Safe (Aluminum) 48 Series (Aluminum)	48 Series w/ Temp. Seals (Aluminum)	41 Series 45 Series (Stainless Steel)	45 Series (BX) w/ Intrinsically Safe (Stainless Steel) 48 Series (Stainless Steel)	48 Series w/ Temp. Seals (Stainless Steel)
Switch Types	Mechanical, Proximity, Inductive					
Available Options	T-Port Beacons, L-Port Beacons, Specialty Beacons, Brackets					

Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

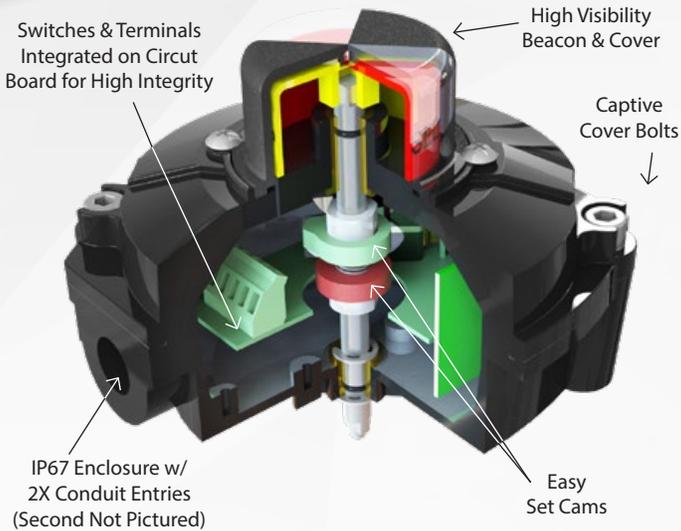

48 Series

The Max-Air 48 Series Explosion Proof aluminum and stainless steel limit switch boxes are available for the highest level of safety in hazardous environments. Extremely reliable, robust, and time tested the 48 Series is an excellent solution for your position monitoring needs. Switches available with mechanical, proximity and inductive types, and fully certified to North American and European standards.

Specifications Table


Ingress Protection	IP67/NEMA4/4X/7/9	
Cable Entries	Standard 1/2" NPT (2 places) Optional M20x1.5 (2 places)	
Temp. Range	Low Temp. (Silicone)	-40°F (-15°C) to 140°F (60°C)
	Standard (BUNA-N)	-4°F (-20°C) to 140°F (60°C)
Terminal Strip	10 Pt. Single Coil & 10 Pt. Dual Coil	
Weight	Aluminum 3.79 lbs (1.72 kg) & Stainless 9.85 lbs (4.47 kg)	
Approvals	See Table on Page 10	

45 Series

The Max-Air 45 Series aluminum and stainless steel series limit switch boxes are an extremely reliable, robust, and time tested solution for your position monitoring needs. Switch boxes available with mechanical, proximity and inductive switch types, and fully certified to North American and European standards.

Specifications Table

Ingress Protection	IP67/NEMA4/4X	
Cable Entries	Standard 1/2" NPT (2 places), Optional M20x1.5 (2 places)	
Temp. Range	Standard (BUNA-N)	-4°F (-20°C) to 176°F (80°C)
Terminal Strip	10 Pt. Single Coil & 10 Pt. Dual Coil	
Weight	Aluminum 1.62 lbs (0.74 kg) & Stainless 3.94 lbs (1.79 kg)	
Approvals	See Table on Page 12	

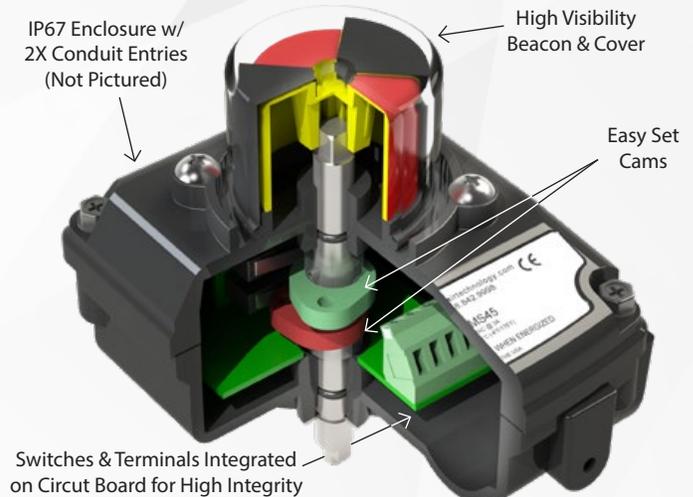


41 Series

The Max-Air 41 Series Technopolymer Limit Switch Box provides unparalleled position indication for rotary actuators. Manufactured completely in technopolymer with stainless steel fasteners CSA Listed, and carrying a NEMA 4/4X rating, these compact lightweight limit switches are an excellent choice for general corrosive environments.

Specifications Table

Ingress Protection	IP65/NEMA4/4X	
Cable Entries	Standard 1/2" NPT (2 places)	
Temperature Range	Standard (BUNA-N)	-4°F (-20°C) to 176°F (80°C)
Terminal Strip	10 Pt. Single Coil & 10 Pt. Dual Coil	
Weight	Technopolymer 0.75 lbs (0.34 kg)	
Approvals	See Table on Page 14	

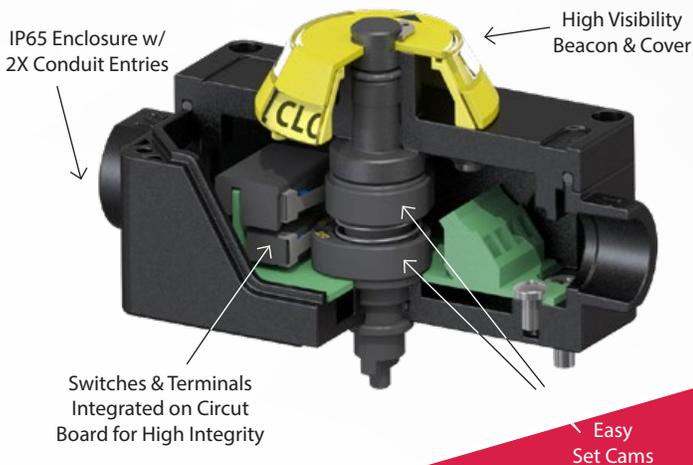

Switch Types

Mechanical, Magnetic Proximity, & Inductive Proximity

MS - Mechanical Switches

Mechanical switches are activated by pressing a spring return lever, and have physical contacts plated with a noble metal such as silver or gold. When energized contact is made, a small arc or spark can be produced within the housing of the switch that is not completely sealed off from the atmosphere. Mechanical switches are passive devices that do not require external power to operate.

41 Series / 45 Series

	Code 0
	Silver Plated Switches SPDT Rating: 5A@125VAC, 3A@30VDC Ambient Temp: -13°F to +185°F

	Code S
	Gold Plated Switches SPDT Rating: 0.1A@125VAC, 0.1A@30VDC Ambient Temp: -13°F to +185°F

48 Series

	Code 0
	Silver Plated Switches SPDT Rating: 10A@125VAC, 6A@30VDC Ambient Temp: -13°F to +185°F

	Code S
	Gold Plated Switches SPDT Rating: 0.1A@125VAC, 0.1A@30VDC Ambient Temp: -40°F to +180°F

PS - Magnetic Proximity Switches

Magnetic proximity switches are activated by the presence of a magnetic field, and have hermetically sealed physical contacts plated with a noble metal such as tungsten or rhodium. The encapsulated contact elements are completely isolated from the atmosphere, eliminating arcs or sparks and preventing corrosion. Magnetic switches are passive devices that do not require external power. Because the contacts are “non-sparking” and “non-contact”, magnetic type switches are commonly used in hazardous locations.

41 Series / 45 Series

	Code 0
	Low Power Reed Switches SPDT Rating: 3W Max, 0.04A@120VAC, 0.20A@24VDC Ambient Temp: -40°F to +221°F

48 Series

	Code M
	Reed Switches SPDT Rating: 100W Max, 0.83A@120VAC, 4.1A@24VDC Ambient Temp: -4°F to +221°F

	Code Q
	Low Temp Reed Switches SPDT Rating: 100W Max, 0.83A@120VAC, 4.1A@24VDC Ambient Temp: -76°F to +257°F

Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

IS - Inductive Proximity

Inductive proximity switches are activated by the presence of a magnetic or ferritic target which disturbs the sensor's own magnetic field. Inductive switches are "active" devices which require external power and are available in a variety of configurations. Inductive type switches are inherently "non-sparking" and usually operate on low voltage DC power, making them well suited for intrinsically safe applications.

41 Series / 45 Series / 48 Series

	Code A
	IFM NS5002 2-Wire NC Switches Rating: 7.5-30VDC, Eexia Ambient Temp: -4°F to +158°F

	Code B
	IFM IS5001 3-Wire PNP NO Switches Rating: 10-36VDC Ambient Temp: -13°F to +176°F

	Code D
	IFM IS5026 2-Wire Programmable Switches Rating: 5-26VDC Ambient Temp: -13°F to +176°F

	Code E
	IFM IS0003 2-Wire NO Switches Rating: 20-140VAC/10-140VDC Ambient Temp: -13°F to +176°F

	Code F
	P&F NJ2-V3-N 2-Wire NC Switches Rating: 8.2VDC, Eexia Ambient Temp: -13°F to +212°F

	Code G
	P&F NBB2-V3-E2 3-Wire PNP NO Switches Rating: 10-30VDC Ambient Temp: -13°F to +158°F

	Code H
	P&F NBB3-V3-Z4 2-Wire NO Switches Rating: 5-60VDC Ambient Temp: -13°F to +185°F

	Code K
	P&F NBB2-V3-E3 3-Wire PNP NC Switches Rating: 10-30VDC Ambient Temp: -13°F to +158°F

	Code L
	P&F NBB2-V3-E0 3-Wire NPN NO Switches Rating: 10-30VDC Ambient Temp: -13°F to +158°F


	Code N
	P&F NCB2-V3-N0 2-Wire NC Switches Rating: 8.2VDC, Eexia Ambient Temp: -13°F to +212°F

48 Series Technical Data

Exploded View, Materials of Construction, & Dimensional Data

48 Series

Exploded View & Bill of Materials

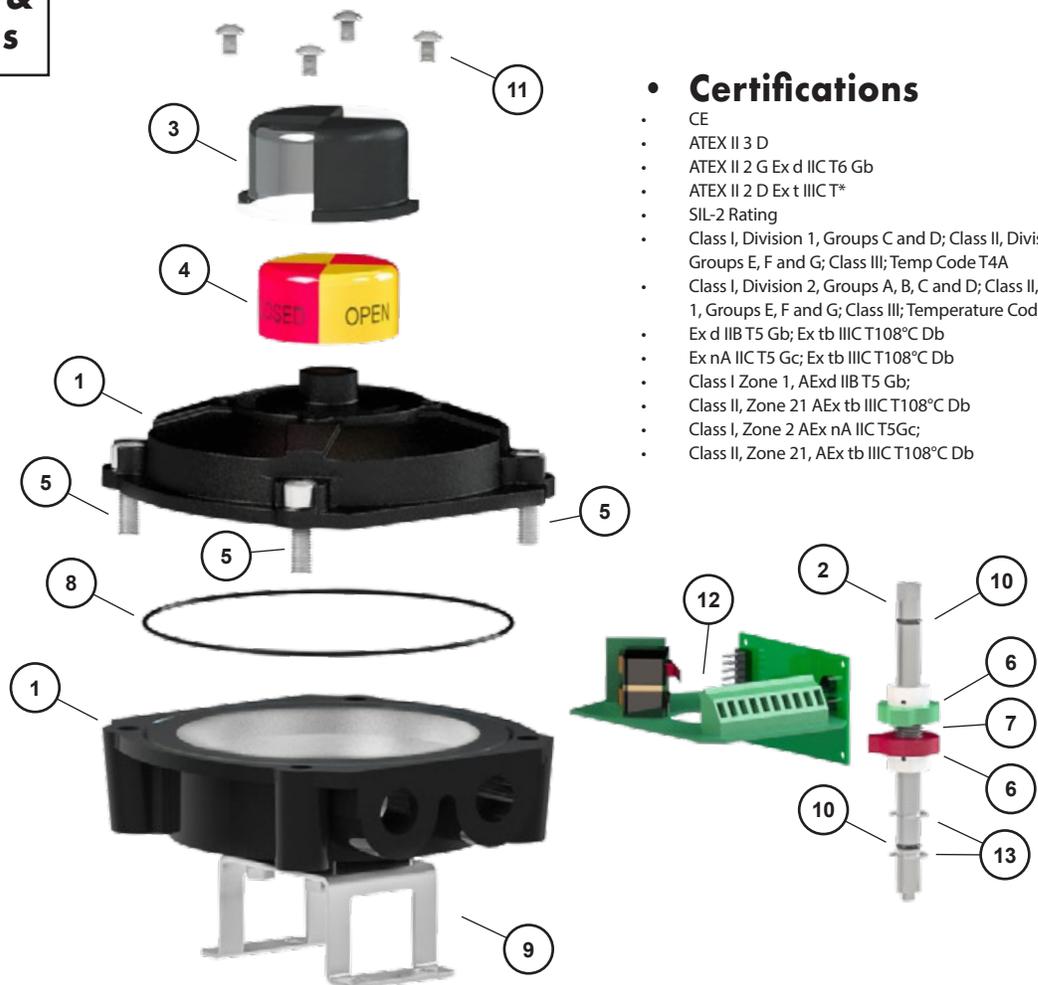

Certifications

- CE
- ATEX II 3 D
- ATEX II 2 G Ex d IIC T6 Gb
- ATEX II 2 D Ex t IIIC T*
- SIL-2 Rating
- Class I, Division 1, Groups C and D; Class II, Division 1, Groups E, F and G; Class III; Temp Code T4A
- Class I, Division 2, Groups A, B, C and D; Class II, Division 1, Groups E, F and G; Class III; Temperature Code T4A
- Ex d IIB T5 Gb; Ex tb IIIC T108°C Db
- Ex nA IIC T5 Gc; Ex tb IIIC T108°C Db
- Class I Zone 1, AExd IIB T5 Gb;
- Class II, Zone 21 AEx tb IIIC T108°C Db
- Class I, Zone 2 AEx nA IIC T5 Gc;
- Class II, Zone 21, AEx tb IIIC T108°C Db

#	DESCRIPTION	MATERIALS
1	Housing	Die Cast Aluminium (AISI 316 Stainless Steel)
2	Shaft	AISI 304 Stainless Steel (AISI 316 Stainless Steel w/ Teflon Coating)
3	Beacon Cover	Polycarbonate
4	High Visibility Beacon	ABS
5	Captive Cover Bolts	Stainless Steel
6	Cams	ABS
7	Spring	Stainless Steel

#	DESCRIPTION	MATERIALS
8	O-Ring	NBR Low Temp Silicone (Optional)
9	Bracket	AISI 304 Stainless Steel AISI 316 Stainless Steel
10	O-Ring	NBR Low Temp Silicone (Optional)
11	Indicator Cover Screws	Stainless Steel
12	PCB Board w/ Switches	Various
13	Shaft Retainer Ring	Stainless Steel




Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions




maxairtech.com

48 Series

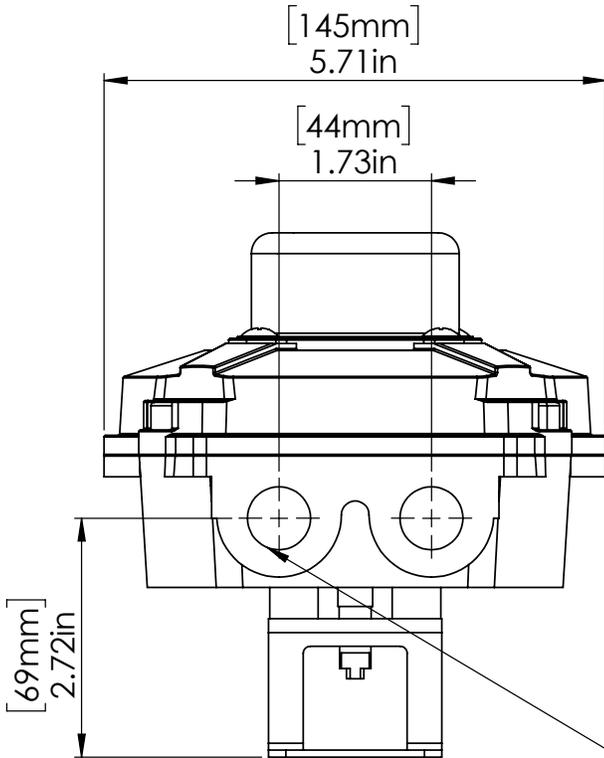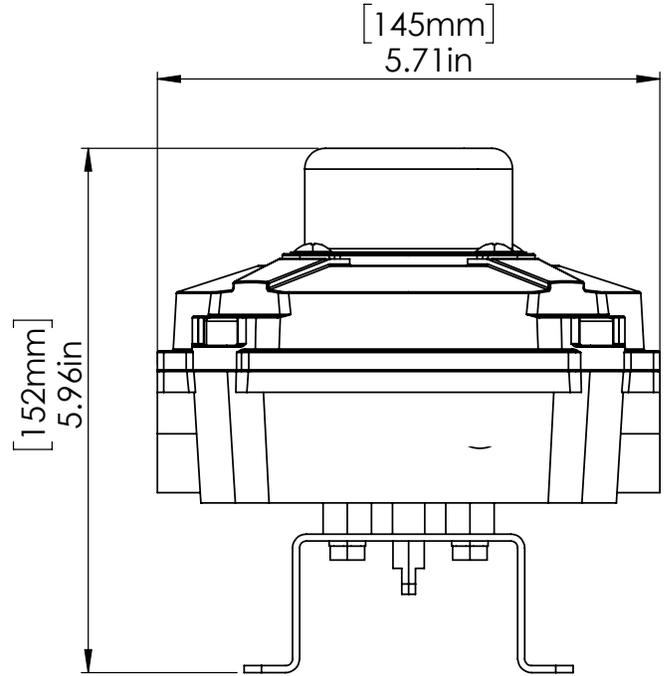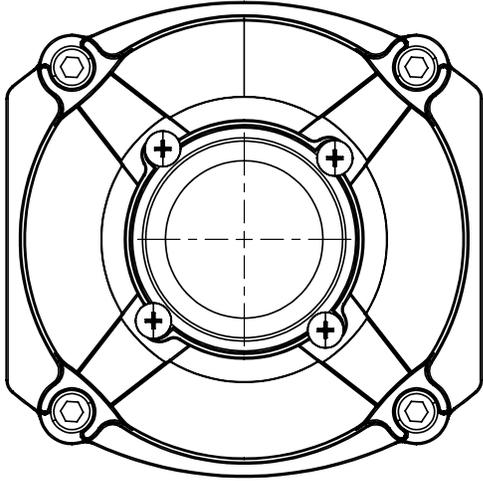

A (4 : 3)

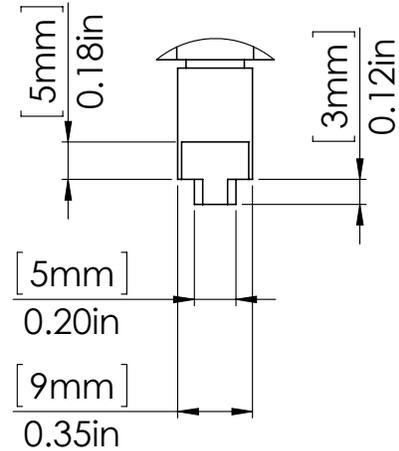


2 X Conduit Entries:
1/2" NPT
(Optional M20 X 1.5)

45 Series Technical Data

Exploded View, Materials of Construction, & Dimensional Data

45 Series

Exploded View & Bill of Materials

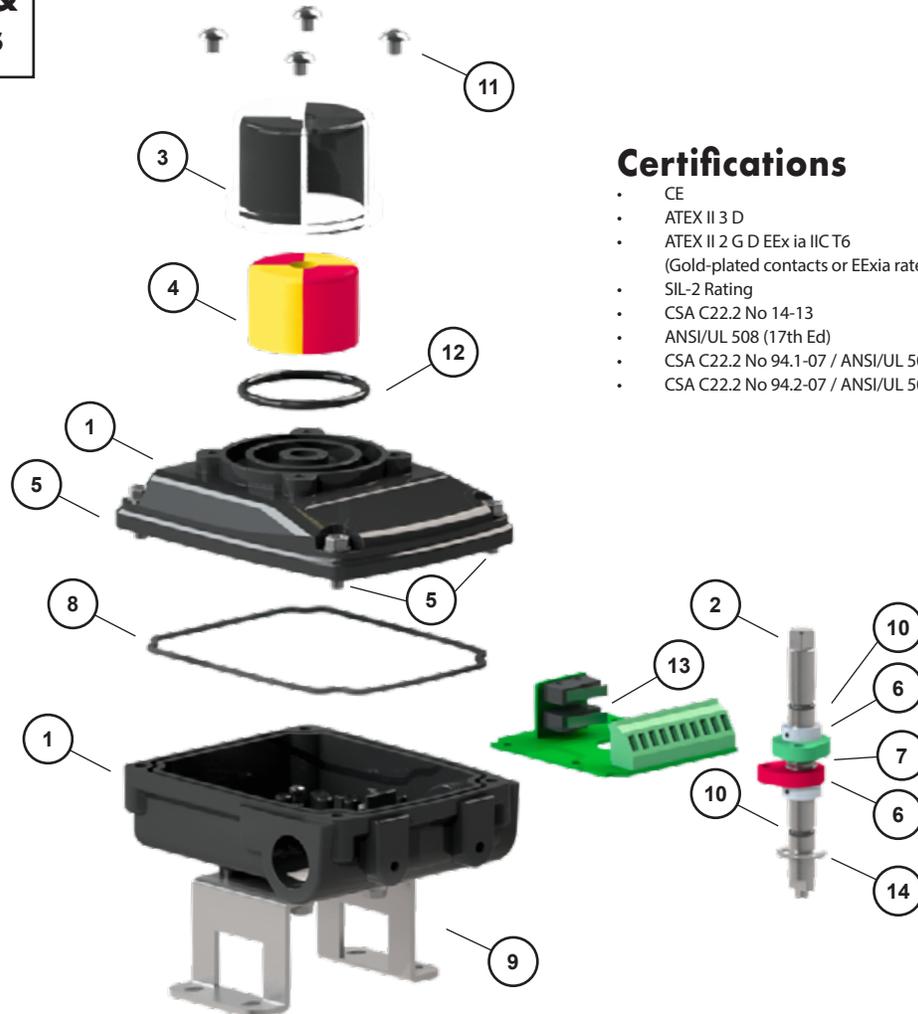

Certifications

- CE
- ATEX II 3 D
- ATEX II 2 G D EEx ia IIC T6
(Gold-plated contacts or EExia rated switches only)
- SIL-2 Rating
- CSA C22.2 No 14-13
- ANSI/UL 508 (17th Ed)
- CSA C22.2 No 94.1-07 / ANSI/UL 50 (12th Ed)
- CSA C22.2 No 94.2-07 / ANSI/UL 50E

#	DESCRIPTION	MATERIALS
1	Housing	Die Cast Aluminium AISI 316 Stainless Steel
2	Shaft	AISI 304 Stainless Steel AISI 316 Stainless Steel w/ Teflon Coating
3	Beacon Cover	Polycarbonate
4	High Visibility Beacon	ABS
5	Cover Bolts	Stainless Steel
6	Cams	ABS
7	Spring	Stainless Steel

#	DESCRIPTION	MATERIALS
8	O-Ring	NBR
9	Bracket	AISI 304 Stainless Steel AISI 316 Stainless Steel
10	O-Ring	NBR
11	Indicator Cover Screws	Stainless Steel
12	Indicator Cover O-Ring	NBR Low Temp Silicone (Optional)
13	PCB Board w/ Switches	Various
14	Shaft Retainer Ring	Stainless Steel



Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions




maxairtech.com


45 Series

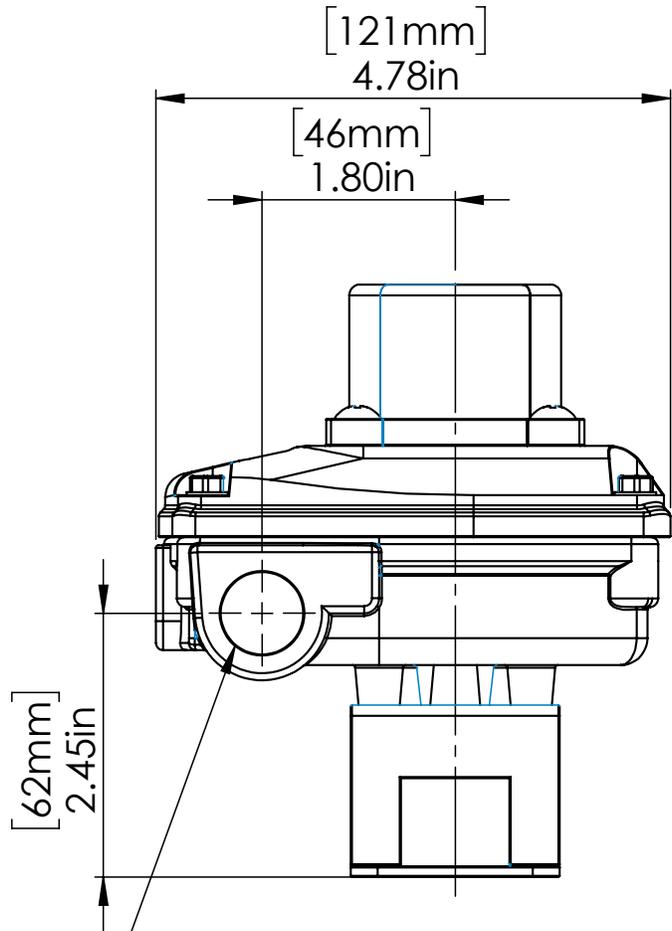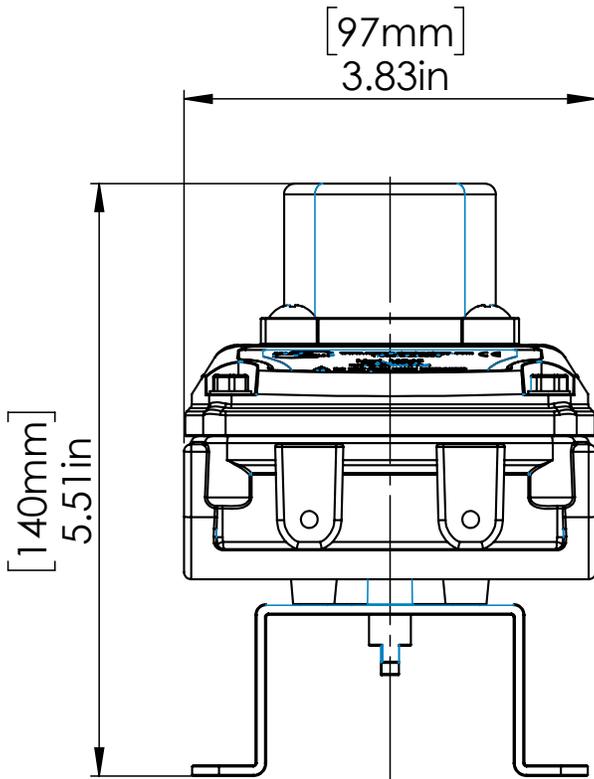

2 X Conduit Entries:
1/2" NPT
(Optional M20X1.5)

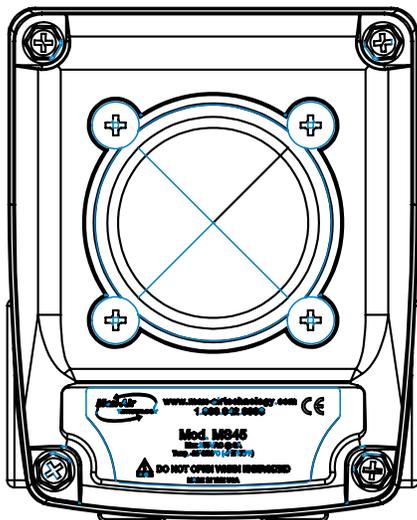

A (2:1)

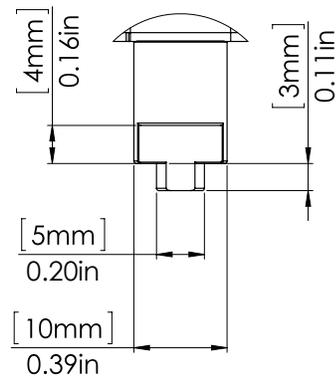


41 Series Technical Data

Exploded View, Materials of Construction, & Dimensional Data

41 Series

Exploded View & Bill of Materials

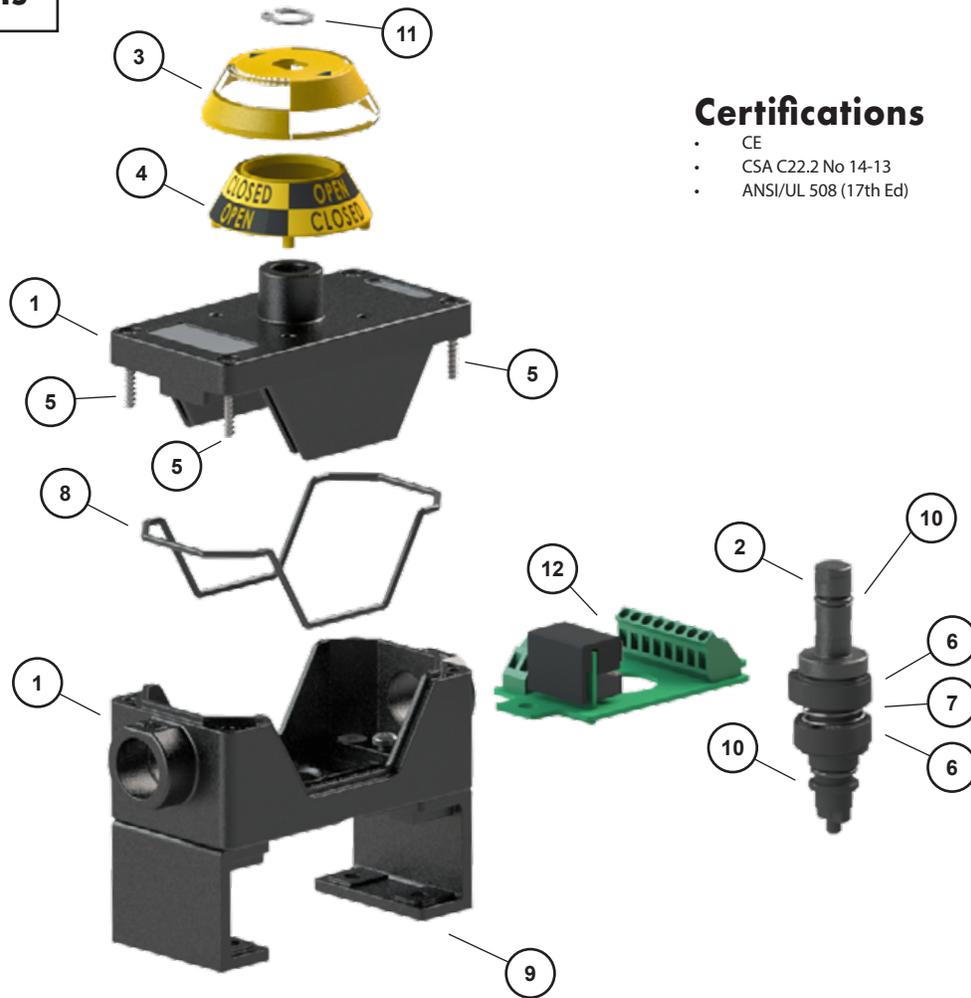

Certifications

- CE
- CSA C22.2 No 14-13
- ANSI/UL 508 (17th Ed)

#	DESCRIPTION	MATERIALS
1	Housing	Technopolymer
2	Shaft	Technopolymer
3	Beacon Cover	Polycarbonate
4	High Visibility Beacon	ABS
5	Cover Bolts	Stainless Steel
6	Cams	ABS

#	DESCRIPTION	MATERIALS
7	Spring	Stainless Steel
8	O-Ring	NBR
9	Bracket	Technopolymer
10	O-Ring	NBR
11	Indicator Snap Ring	Stainless Steel
12	PCB Board w/ Switches	Various


Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions



maxairtech.com

41 Series

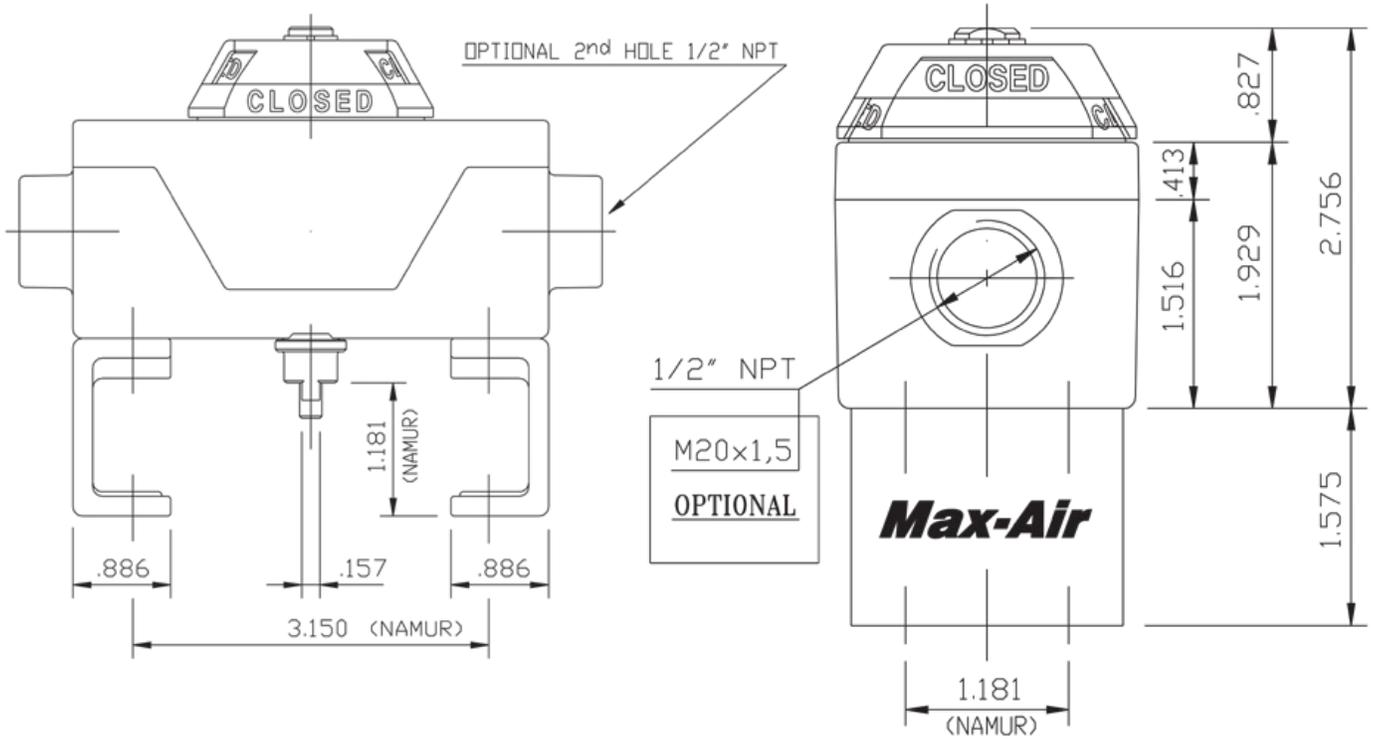

Wiring Diagrams


Diagrams for the 48 & 45 Series Limit Switch Boxes

45/48 Series - Mechanical/Proximity



WARNING: NEMA 4, 4x / IP67 protection depends on the wiring connection, so the use of inappropriate components and/or wrong installation will result in a decrease in the protection rating of the switch box.

45/48 Series MS, PS Type Switches 2x Mechanical/Proximity

TWO MICRO SWITCHES SPDT,
MECHANICAL OR MAGNETIC



(Dual Coil Board Option Shown)

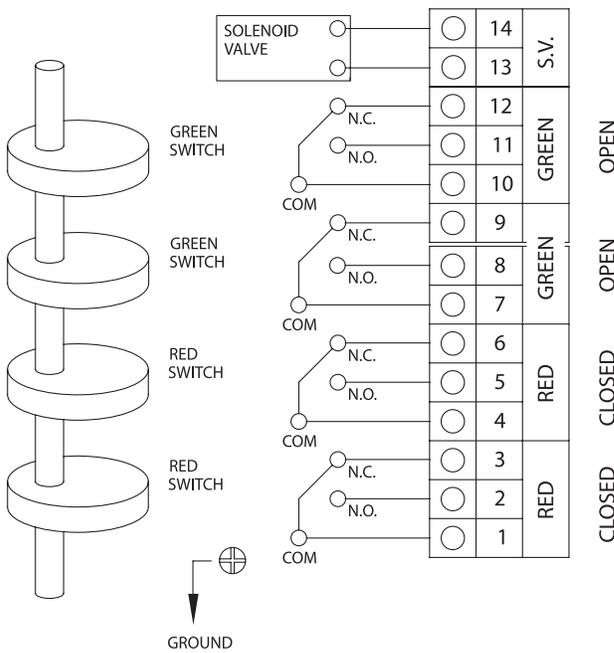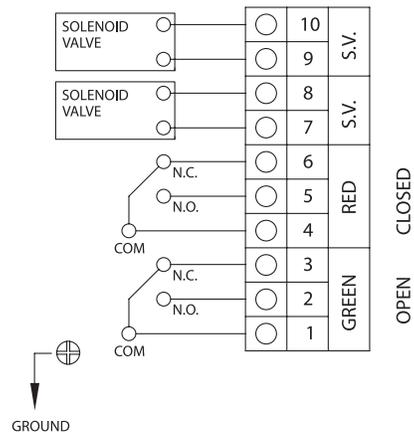

48 Series MS Type Switches Only 4x Mechanical

FOUR MICRO SWITCHES SPDT,
MECHANICAL

Limit Switch Technical Brochure

Max-Air Technology Inc. | Rotary Actuators & Valve Automation Solutions





maxairtech.com

45/48 Series Inductive Switches

WARNING: NEMA 4, 4x / IP67 protection depends on the wiring connection, so the use of inappropriate components and/or wrong installation will result in a decrease in the protection rating of the switch box.

45/48 Series IS Type Switch (3-Wire) Codes: B, G, K, L

THREE WIRES PROXIMITY

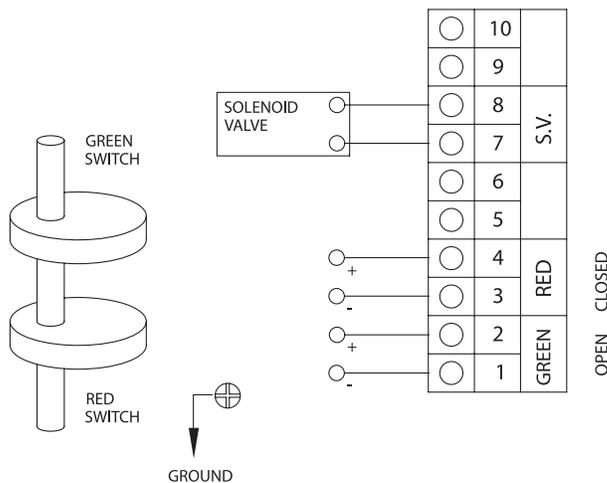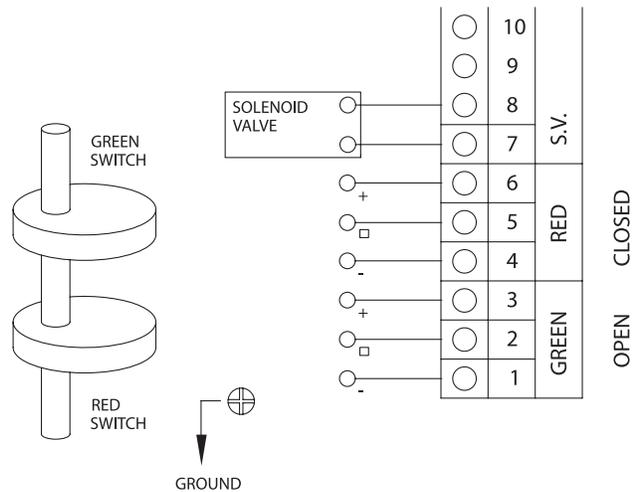

45/48 Series IS Type Switch (2-Wire) Codes: A, D, E, F, H, N


TWO WIRES PROXIMITY

Wiring Diagram

Diagrams for the 41 Series Limit Switch Boxes

41 Series - Mechanical/Proximity

WARNING: NEMA 4, 4x / IP67 protection depends on the wiring connection, so the use of inappropriate components and/or wrong installation will result in a decrease in the protection rating of the switch box.

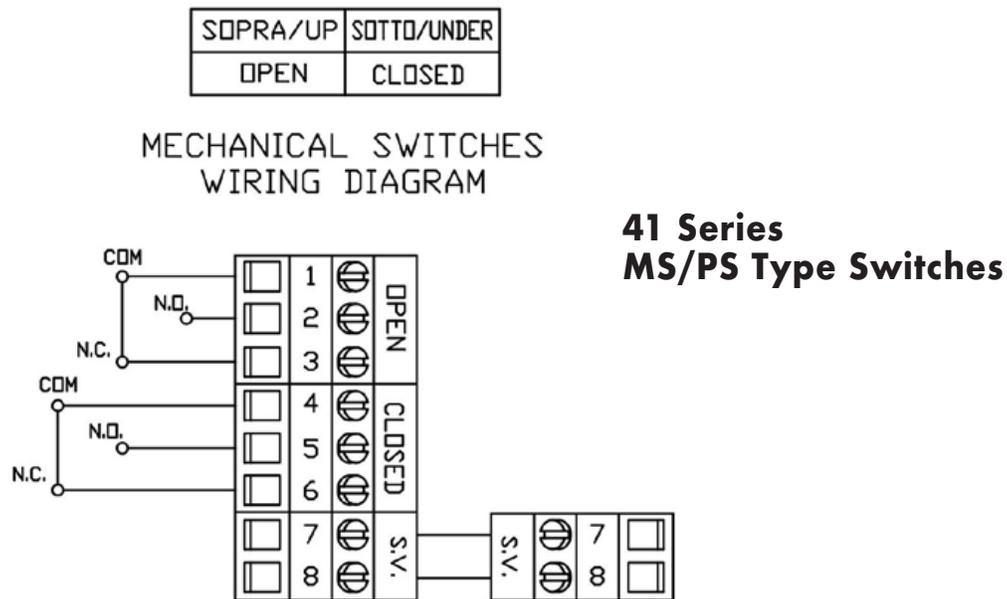




41 Series - Inductive Switches

WARNING: NEMA 4, 4x / IP67 protection depends on the wiring connection, so the use of inappropriate components and/or wrong installation will result in a decrease in the protection rating of the switch box.

41 Series IS Type Switches (2-Wire)


SOPRA/UP	SOTTO/UNDER
OPEN	CLOSED

2 WIRES PROXIMITY WIRING DIAGRAM

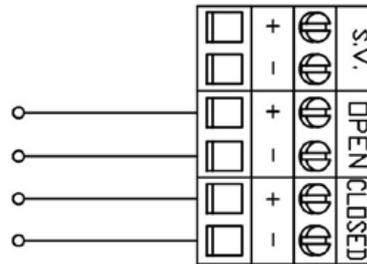

SOPRA/UP	SOTTO/UNDER
OPEN	CLOSED

3 WIRES PROXIMITY WIRING DIAGRAM

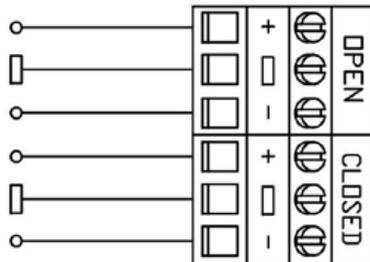

41 Series IS Type Switches (3-Wire)

MAX-AIR TECHNOLOGY

The Best Way To Automate Your Process



Your nearest Max-Air dealer can be found at:



maxairtech.com

Max-Air Technology, Inc. • 114 Resource Drive • Wentzville, MO 63385 • United States of America
Tel +1.636.272.4934 • Toll Free 888.842.9998 • Fax 636.272.4937 • www.maxairtech.com • info@maxairtech.com

© Max-Air Technology, Inc. 2020



R: 04/20/20